


EC-2	
SHEET #	REVISIONS
DEF #	DATE BY
NEE File #	06-2717
Checked by:	MJM
Drawn by:	ALB
Scale:	AS SHOWN
Date:	10-19-06

TYPICAL RIVER BANK  
PREVENTATIVE MAINTENANCE  
CROSS-SECTIONS  
CONNECTICUT RIVER  
THE NARROWS - GILL, MA  
"CAMPGROUND POINT"

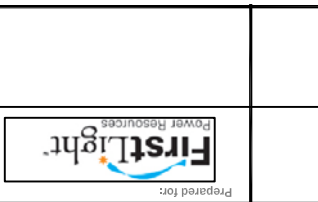


9 RESEARCH DRIVE  
AMHERST, MA 01002  
TEL: (413) 256 0202  
FAX: (413) 256 1092  
WWW.NEEINC.COM

NEW ENGLAND ENVIRONMENTAL, INC.  
ENVIRONMENTAL CONSULTING SERVICES

Prepared by:

- NOTES:
1. PREVENTATIVE MAINTENANCE WORK SHALL BE DONE WITHOUT ANY HEAVY MACHINERY. THE INTENTION OF THIS WORK IS TO STABILIZE ERODING RIVERBANK AND SLOPES USING BIOENGINEERING TECHNIQUES.
  2. LEANING TREES SHOULD BE CUT DOWN AND INCORPORATED INTO STABILIZATION PLAN. SLOPES SHALL BE SMOOTHED USING HAND TOOLS (I.E.: SHOVELS AND RAKES)
  3. ALL HEALTHY TREES AND SHRUBS, SHALL BE LEFT INTACT AND SHALL NOT BE REMOVED.
  4. COIR LOGS SHALL BE USED, AS NECESSARY, TO STABILIZE THE TOE OF SLOPE.
  5. ONLY BIODEGRADABLE EROSION CONTROL BLANKETS SHALL BE USED.
  6. ONLY NATIVE SEED AND PLANTS SHALL BE USED. STRAW WATTLES SHALL BE USED AS NECESSARY TO PREVENT EROSION.
  7. THE ESTIMATED LENGTH OF BANK STABILIZATION WORK IS 3300 LINEAR FEET.

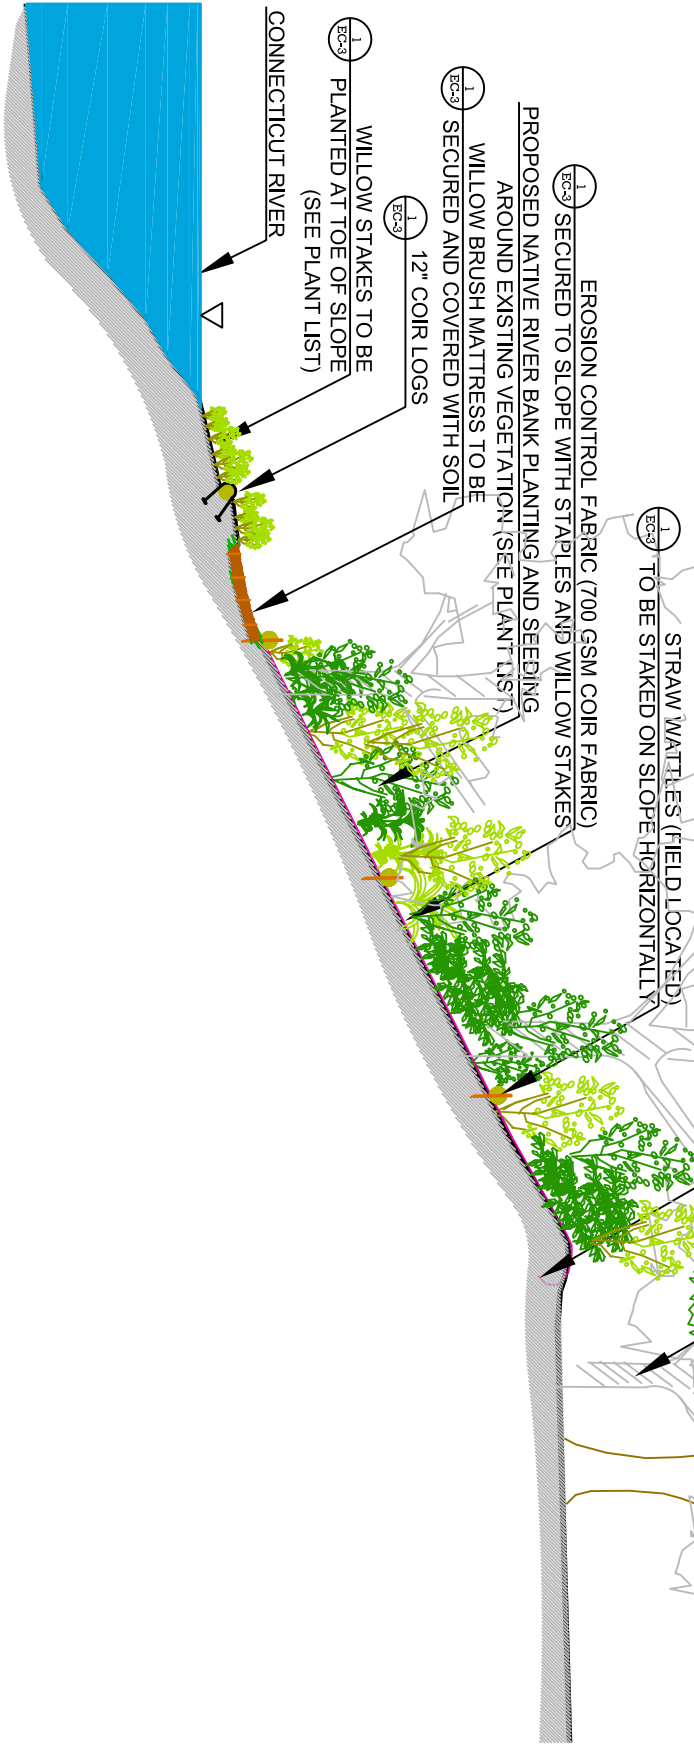

1 TYPICAL CONNECTICUT RIVER BANK  
EC-2 CROSS SECTION

SCALE 1" = 10'-0"